
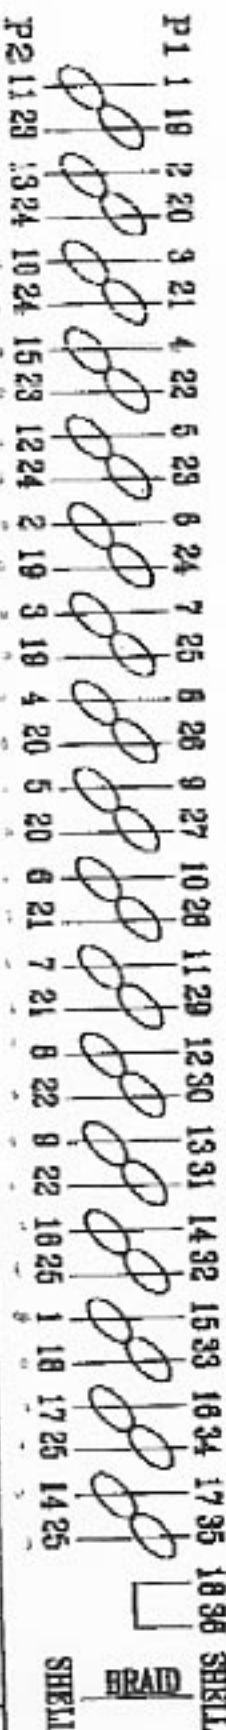


LTR	REV.	DESCRIPTION	DATE

HP-CN36M

L±T (mm)

DB25M

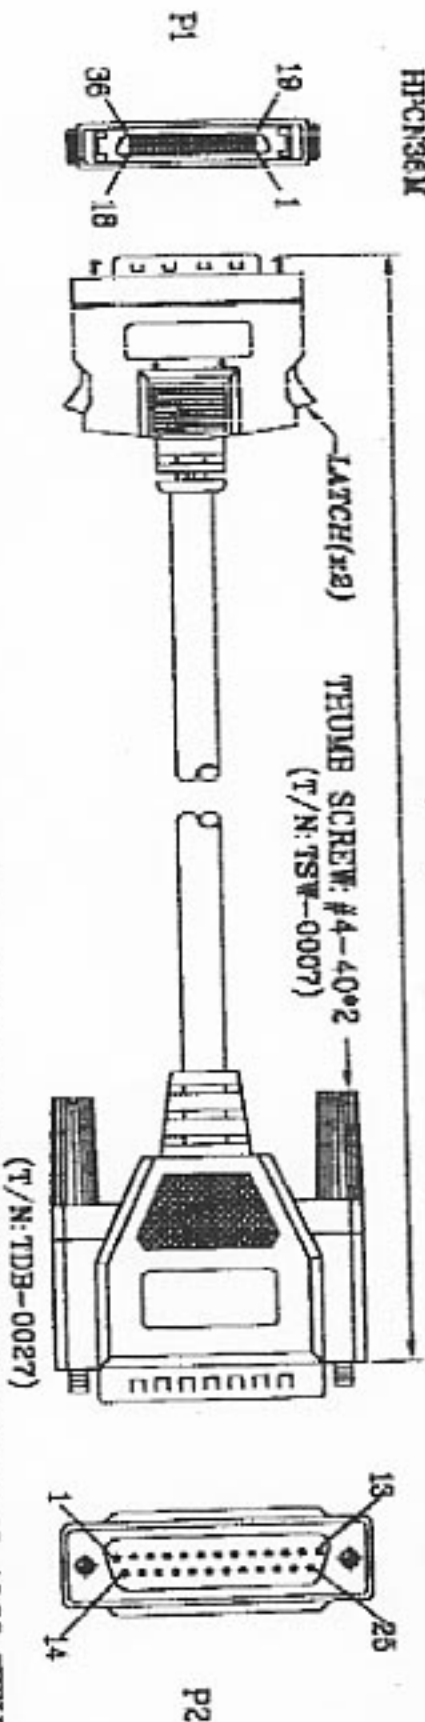

NOTE:

1. CABLE UL-20276 28AWG(7/0.127 T.C)*18TP+INS: PP+AL/MYLAR+DRAIN WIRE +BRAID(85%) JACKET: PVC OD: 7.5±0.15mm COLOR: BEIGE(NK-A03).

2. CONNECTOR:

- P1: HPCN36P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- P2: DB25P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- 3. HOOD: P1&P2: MOLDED TYPE COLOR: BEIGE(NK-A03).
- 4. SHIELD: COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
- 5. ELECTRICAL TEST: <1>100% OPEN SHORT MS WIRE TEST.

<2>CONTACT RESISTANCE 30 MAX
<3>INSULATION RESISTANCE 20MO MIN.

6. PACKING: SEE P-0039 REV.C PACKING DRAWING.
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

ISO-0408-3	AK 8774	5000	50	DB VP4
ISO-0408-2	AK 8772	5005	30	DB VP4
ISO-0408-1	AK 8770	1600	50	DB VP4
DWG	P/N	L(mm)	T(mm)	BLISTER

Tolerance Inch N/A		Title	
X	.015	.30	HP CN36M/DB25M CABLE
XX	.010	.10	
XXX	.005	.05	
Drawn: 01/11		Customer: P/N	
Check:		App'd:	
Eng:		Scale: NONE	
DWG No: 130-0408		REV: A	
		Sheet: 1/1	